



LED100WPS1-24

Switch Mode LED Driver
Constant Voltage with Isolation
White Steel Case

Electrical Specifications

Input Voltage Range:	120-277 Vac Nom. (108-305Vac)
Frequency:	50/60 Hz Nom. (47-63 Hz Min/Max)
Power Factor:	>0.90 @ 80-100% load, 120V-277V
Inrush Current:	20A @ 230V
Max Input Current:	0.985A @120Vac; 0.43A @277Vac
Maximum Power:	100W
Line Regulation:	± 1%
Load Regulation:	± 2%
THD:	≤ 20% @ 80-100% load, 120V-277V
No Load Power Consumption	< 2W
Ripple & Noise (pk-pk)	< 3%
Withstand voltage	Input to output, 2,800Vdc, 2mA
Leakage Current:	Maximum 0.5mA at 277Vac, 60Hz input
Protection:	Over current, over voltage, short circuit protection. Hiccup mode on all.

Environmental Specifications

Minimum Starting Temp:	-40°C
Maximum Case Temp.	90°C
Storage Temperature:	-40°C to +85°C
Humidity:	5% to 95%
Cooling:	Convection
Vibration Frequency:	5 to 55 Hz/2g, 30 minutes
Sound Rating:	Class A
Lifetime:	50,000 hrs @ Tc=74°C (see graph for details)
Weight:	1.1 lbs (0.5 kg)



- Total Power: 100 Watts
- Input Voltage: 120-277 Vac Nom.
- UL Dry & Damp Location Rated
- UL Type HL Rated for Hazardous Locations
- UL Sign Components Manual (S.A.M.)
- 5 year warranty
- **UPDATED TO UL CLASS P**

Constant Voltage - Product Specifications

Model Number	Output Voltage (Vdc ±5%)	Output Current Range (mA)	Max. Output Power (W)	Typical Efficiency
LED100WPS1-24 •	24	0-4150	100	88%

Class 2: US/Canada
 • Indicates S.A.M.

Safety Cert.	Standard
UL/CUL	UL8750, UL879, CAN/CSA-22.2 No. 250.13-12
CE	EN61347-1, EN61347-2-13
EMC Standard	Notes
FCC, 47CFR Part 15	ANSI C63.4:2009 Class B (Consumer Limit)
EN61000-3-2	Harmonic Current Emissions Class C




Note:
 LED drivers are designed and intended to operate LED loads only. Non-LED loading may be outside the specified design limits of our LED drivers, and therefore cannot be covered by any warranty. If you desire to use our LED drivers to operate non-LED loads please contact us to discuss compatibility.
 Specifications subject to change without notice.


Rev 5-16-17




Dimensions - Inches (mm)

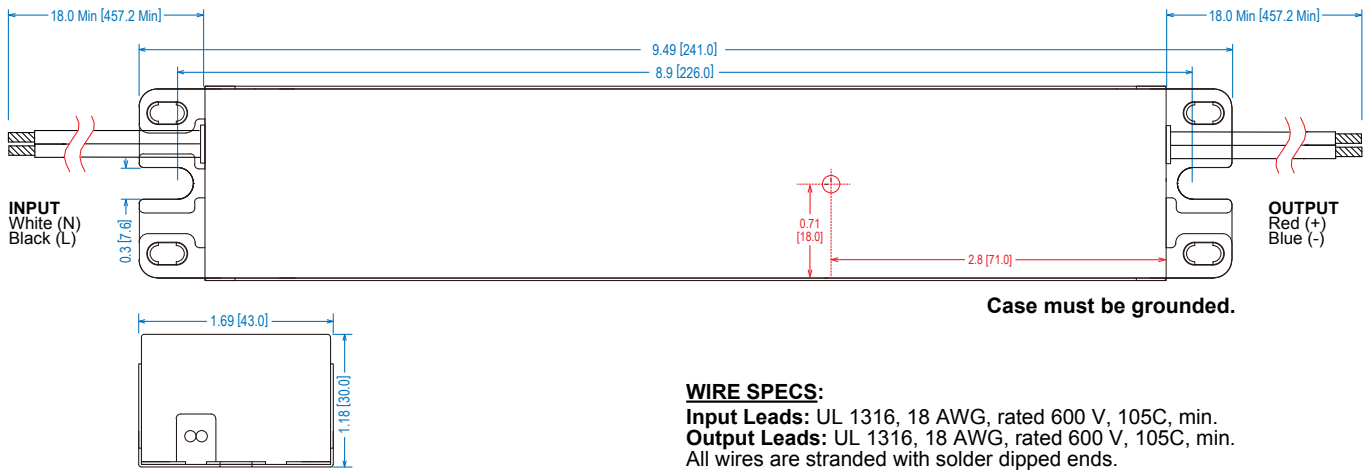


Power Factor / Load

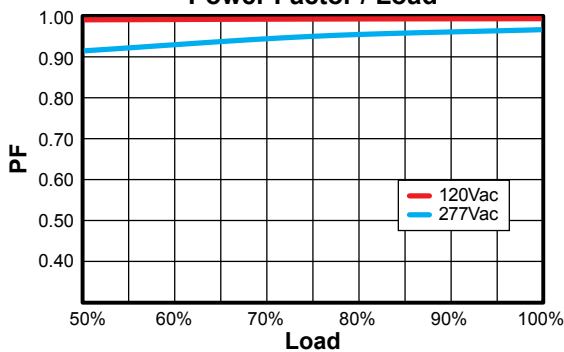

Efficiency / Load

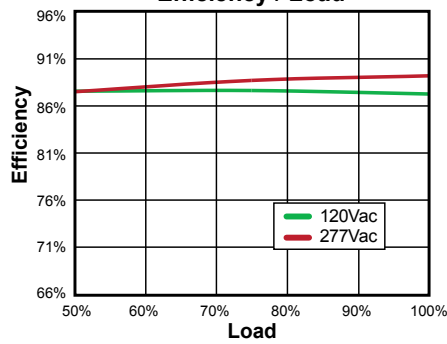

Lifetime/Case Temperature
(Full Load @ 120Vac)

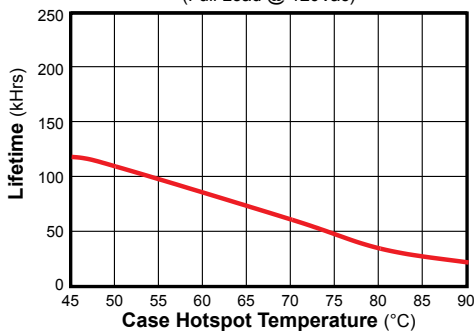

Note:

The area under the life-temperature curve represents where the driver has highly reliable operation within specification. Driver performance may drift out of published specifications as the hours of operation exceed the curve at a given temperature. Higher operating temperatures increase the chances of a failure to function. Other electrical, mechanical and environmental factors affect driver lifetime but are not represented in this calculation.

UL Conditions of Acceptability

See website for additional information

PRODUCT NOTES:

- Rev A: UL Recognized for US and Canada
- Rev B: UL Listed for US and Canada, 5/2017