



SD2-120 Step-Dimming Module

Bi-Level dimming control module,
For use with 0-10V dimmable LED Drivers

Rev 07-19-2017

Intelligent Device
ECOSYSTEM
dynamic

Electrical Specifications

Input Voltage Range:	120 Vac Nom. (100-132 V Min/Max)
Frequency:	50/60 Hz Nom. (47-63 Hz Min/Max)
Max Pass Current:	1.0A @ 120Vac Input
Max LED Driver Power:	100W
Max Insertion Loss:	<1.5W @ 100W LED Driver
Class 2 Control Output:	0-10V (Current Sinking only, 50mA max)
Warranty:	5 years

Environmental Specifications

Storage Temperature:	-40°C to +85°C
Max Case Temp:	75°C
Min Operating Temp:	-40°C
Humidity:	5% to 95%
Lifetime:	1,000,000 Switching Cycles

The SD2 works with two standard wall switches to provide quick switching between 100% and 50% light output from LED luminaires.

- Works with 0-10V dimmable LED drivers
- Eliminates need for expensive dimmer unit
- Works with occupancy sensors
- Class 2 Output

NOTES:

1. *Compatibility with 0-10V dimmable drivers manufactured by companies other than Thomas Research Products cannot be assured. Please contact your sales representative for a list of compatible drivers.*
2. *This device is designed to operate with standard wallbox switches only.*
3. *UL requires that these modules be installed within the luminaire enclosure.*



SD2-120 Step-Dimming Operation

Switch Position		Driver Current Output
S1	S2	
Closed	Closed	100%
Closed	Open	<50%
Open	Closed	<50%
Open	Open	0%


Contact TRP for custom output variants!



SD2-120 Step-Dimming Module

Bi-Level dimming control module,
For use with 0-10V dimmable LED Drivers

Dimensions

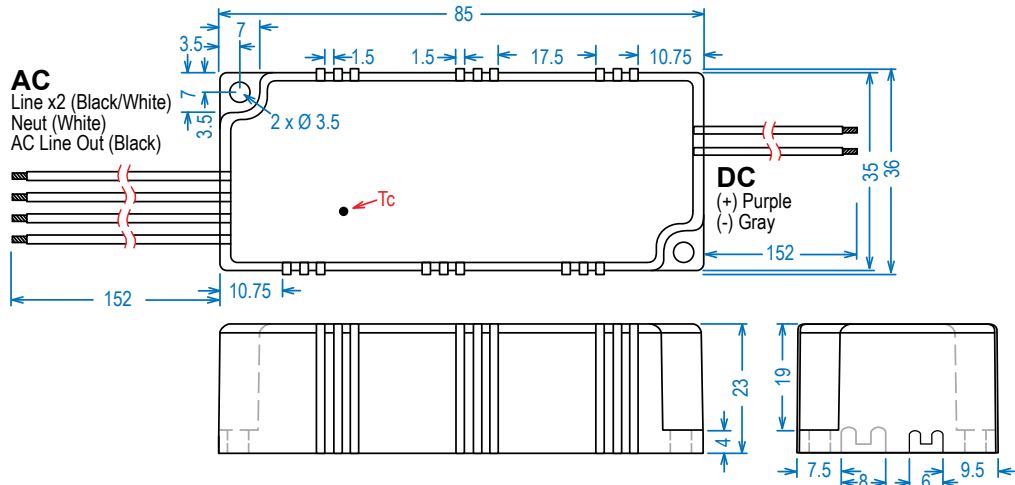


Wiring Connections


Standard Wiring:

Notes:
Lead placement on wiring diagram is optimized for clarity, and not intended to reflect actual lead exit locations on SD case.

Wall switches S1 & S2 should be located next to each other to allow for Full ON / Low ON / OFF control.

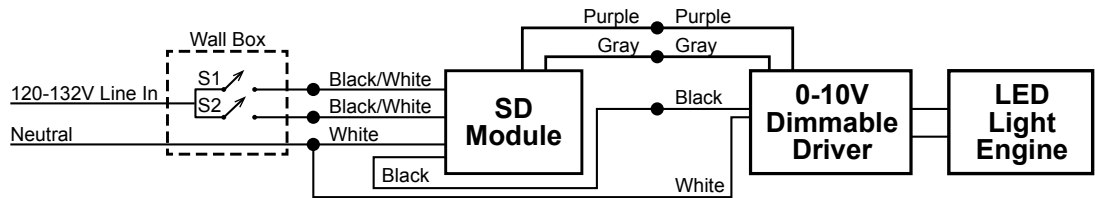

Wiring with Occupancy Sensor:

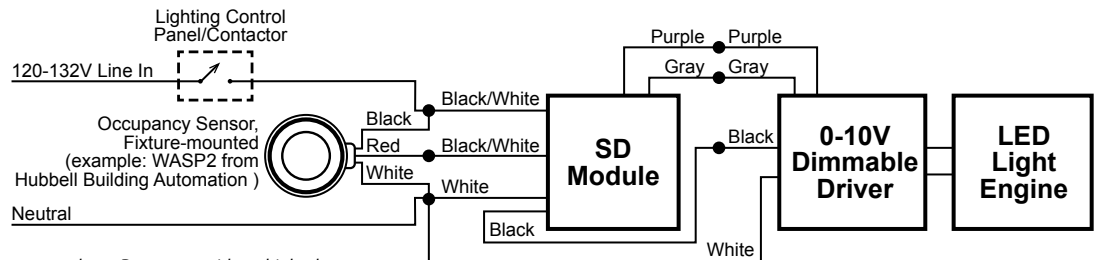

Note:
Incoming power from branch must be on same phase. Do not use with multiple phases.